

VSP6000P



VSP6000P VeroStar™ Full GNSS Precision Antenna + L-Band

Frequency GPS/QZSS-L1/L2/L5, QZSS-L6, GLONASS-G1/G2/G3, Galileo-E1/E5a/E5b/E6, BeiDou-B1/B2/B2a/B3, NavIC-L5
Coverage: + L-Band correction services

Overview

The light and compact patented VeroStar™ VSP6037L-MAR antenna is designed for high-accuracy positioning while being robust and reliable. This antenna employs Tallysman®'s unique VeroStar™ technology, providing high gain over the full GNSS spectrum: GPS/QZSS-L1/L2/L5, QZSS-L6, GLONASS-G1/G2/G3, Galileo-E1/E5a/E5b/E6, BeiDou-B1/B2/B2a/B3, and NavIC-L5, including the satellite-based augmentation system (SBAS) available in the region of operation [WAAS (North America), EGNOS (Europe), MSAS (Japan), or GAGAN (India)], as well as L-band correction services.

With an exceptionally low roll-off from zenith to the horizon, each VeroStar antenna provides best-in-class tracking of GNSS and L-Band correction signals from low elevation angles. In addition, the optimized axial ratio at all elevation angles results in excellent multipath rejection, thus enabling accurate and precise code and phase tracking of GNSS and L-band correction signals. Also, a wide-band spherical antenna element enables VeroStar antennas to deliver a ± 2 mm phase centre variation (PCV), making them ideal for high-precision applications, such as maritime positioning, autonomous vehicle navigation (land, sea, and air), and smart survey devices.

The housed antenna, featuring an integrated rubber bumper to absorb routine impacts, has passed a battery of tests (water pressure, altitude, salt fog, shock, drop, and vibration) to ensure it can survive the rigours of day-to-day field use.

The unique features of the VeroStar antenna guarantee it can deliver a high signal-to-noise ratio (SNR) and highly accurate and precise code and phase tracking of GNSS signals from all elevation angles in the most challenging environments.



Applications

- High-precision GNSS systems
- Marine navigation
- All embedded precision applications, such as:
 - Autonomous vehicle navigation (land, sea, air)
 - Deformation monitoring stations
 - Land survey rover
 - RTK/PPP systems
 - Reference networks

Features

- Tight phase centre variation (± 2 mm typ.)
- Low axial ratios from zenith to horizon
- Low roll-off from zenith to the horizon
- Superior low-elevation L-Band correction reception
- Light, compact, and robust design
- IEC 60945, IEC 61108, IP69K, REACH, and RoHS compliant

Benefits

- Consistent performance across all frequency bands
- Excellent GNSS tracking from low elevation angles
- Extreme accuracy and precision
- Excellent multipath rejection

About Tallysman: With global headquarters and manufacturing in Ottawa, Canada, Tallysman is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Tallysman's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at www.tallysman.com

Contact us:
info@tallysman.com
T: +1 613 591-3131

VSP6000P VeroStar™ Full GNSS Precision Antenna + L-Band

Frequency Coverage: GPS/QZSS-L1/L2/L5, QZSS-L6, GLONASS-G1/G2/G3, Galileo-E1/E5a/E5b/E6, BeiDou-B1/B2/B2a/B3, NavIC-L5
+ L-Band correction services

Antenna

Technology Full GNSS frequency crossed dipoles

		Gain dBic typ. at Zenith	Axial Ratio dB at Zenith
GNSS			
GPS / QZSS	L1	4	< 1.0
	L2	4.5	< 1.0
	L5	4	< 1.0
GLONASS	G1	4	< 1.0
	G2	4.5	< 1.0
	G3	4.5	< 1.0
Galileo	E1	4	< 1.0
	E5A	4	< 1.0
	E5B	4.5	< 1.0
	E6	4	< 1.0
BeiDou	B1	4	< 1.0
	B2	4.5	< 1.0
	B2a	4	< 1.0
	B3	4	< 1.0
IRNSS / NavIC	L5	4	< 1.0
QZSS	L6	4	< 1.0
L-Band Services (1525 MHz - 1559 MHz)		4	< 1.0
Satellite Communications			
Iridium		-	-
Globalstar		-	-
Other			
Axial Ratio at 10°	5.0 dB max.	Efficiency	> 70%
PC Variation	± 2 mm typ. (no azi.)		

Mechanicals

Size	161.8 mm (dia.) x 75.5 mm (h.)
Weight	500 g
Radome	EXL9330 plastic
Mount	5/8"-11 TPI or 1"-14 TPI
Available Connectors	TNC (female)

Environmental

Operating Temperature	-45 °C to +85 °C
Storage Temperature	-55 °C to +95 °C
Vibration	MIL-STD-810E - Test method 514.5
Shock	MIL-STD-810G - Test method 516.6
Salt Fog	MIL-STD-810G - Test method 509.6
IP Rating	IP69K
Compliance	IEC 60945, IEC 61108, IPC-A-610, FCC Part 15, RED / CE Mark, RoHS, REACH

Warranty:



Parts and Labour	3-year standard warranty
-------------------------	--------------------------

Low Noise Amplifier (LNA) - Measured at 3V and 25°C

Frequency Bandwith		Out of Band Rejection	
		Upper Band	Lower Band
-	-	-	-

Architecture	Passive
Gain	-
Noise Figure	-
VSWR	-
Supply Voltage Range	-
Supply Current	-
ESD Circuit Protection	-
P 1dB Output	-
Group Delay	-
PCO	-

Mechanical Diagram

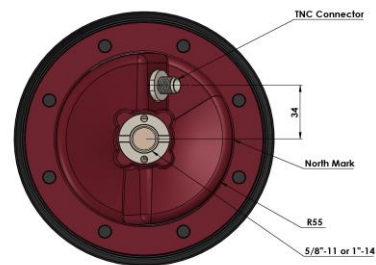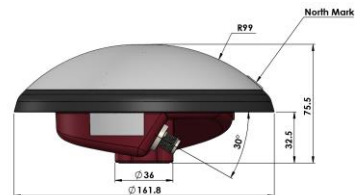

Ordering Information

Part Number **33-VSP6000P-zz**

where zz = mounting type: 58 = 5/8"-11 TPI | 01 = 1"-14 TPI

Please refer to our **Ordering Guide** to review available radomes and connectors at:
<https://www.tallysman.com/resource/tallysman-ordering-guide/>